

# PD805KL/PD805K/ PD805KW


Thermal Receipt Printer



- Wall mounting
- Call reminder and error alarm
- Support QR code & PDF 417
- IAP on line upgrade
- Printer head over-temperature protection



## APPLICATIONS

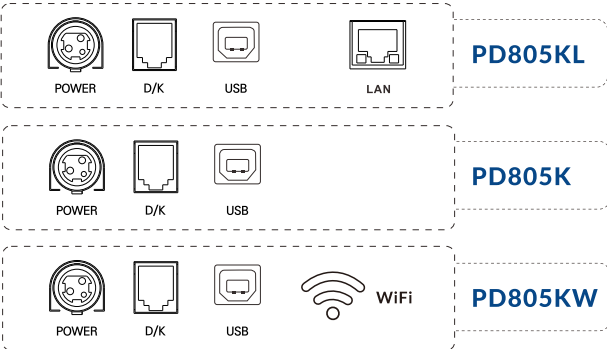

PDIT

## Feature

# PD805KL/PD805K/ PD805KW



| Model           | PD805KL                                                                                                                 | PD805K | PD805KW  |
|-----------------|-------------------------------------------------------------------------------------------------------------------------|--------|----------|
| Printing method | Direct thermal                                                                                                          |        |          |
| Printing speed  | 230 mm/s                                                                                                                |        |          |
| Paper width     | 79.5±0.5mm                                                                                                              |        |          |
| Paper thickness | 0.06~0.08mm                                                                                                             |        |          |
| Column capacity | 576 dots/line or 512 dots/line                                                                                          |        |          |
| Interface       | USB+Lan                                                                                                                 | USB    | USB+WiFi |
| Line spacing    | 3.75mm(Adjustable by commands)                                                                                          |        |          |
| Character size  | ANK, Font A: 1.5×3.0mm(12×24 dots) Font B:1.1×2.1mm(9×17 dots)<br>Simplified/Traditional Chinese: 3.0×3.0mm(24×24 dots) |        |          |

| Barcode Character         |                                                                                                                                                                                                                                                                              |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Extension character sheet | PC437(Std.Europe) / (Katakana)/ PC850(Multilingual)/ PC860(Portugal) / PC863(Canadian)/ PC865(Nordic) / (West Europe) / (Greek) / (Hebrew) / (East Europe) / (Iran) / (WPC1252) / PC866(Cyrillic#2) / PC852(Latin2) / (PC858)/ (IranII) / (Latvian) / (Arabic) / (PT1511251) |
| 1D Barcode                | UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/CODE39/ITF/CODABAR/CODE93/CODE128                                                                                                                                                                                                        |
| 2D Barcode                | QR CODE / PDF417                                                                                                                                                                                                                                                             |
| Input buffer              | 96 Kbytes                                                                                                                                                                                                                                                                    |
| NV Flash                  | 256 Kbytes                                                                                                                                                                                                                                                                   |

| Power               |                      |
|---------------------|----------------------|
| Power adaptor Input | AC 100~240V, 50~60Hz |
| Printer Input       | DC 24V/2.5A          |
| Cash drawer         | DC 24V/1A            |

| Physical characteristics |               |
|--------------------------|---------------|
| Weight                   | 0.85 Kg       |
| Dimensions               | 173*127*130mm |

| Environmental Requirements |                                         |
|----------------------------|-----------------------------------------|
| Work environment           | Temperature (0~45°C), humidity(10~80%)  |
| Storage environment        | Temperature(-10~60°C), humidity(10~90%) |

| Reliability       |                  |
|-------------------|------------------|
| Auto cutter       | Partial          |
| Cutter life       | 1.5 million cuts |
| Printer head life | 150Km            |

| Software  |                              |
|-----------|------------------------------|
| Emulation | ESC/POS                      |
| Driver    | Windows / Linux              |
| Utility   | Windows & Linux test Utility |

