





-MS633 Series- Bluetooth 2D Ring Scanner



MS633



MS633 LR

QUICK START GUIDE

V1.2


Copyright

Thank you for purchasing the Unitech product.

This manual explains how to install, operate and maintain our product. No part of this publication may be reproduced or used in any form, or by any electrical or mechanical means, such as photocopying, recording, or information storage and retrieval systems, without permission in writing from the manufacturer. The material in this manual is subject to change without notice.

Laser Safety

Do not stare into the laser beam or view directly with optical instruments.

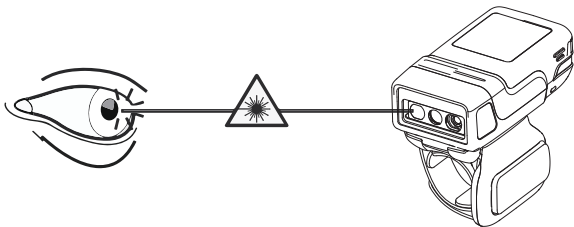

Battery Safety

Do not immerse or expose to water or other liquids, or expose to fire, explosion, or other hazards.

Do not disassemble or open, crush, bend or deform, puncture, or shred.

Do not short circuit a battery or allow metallic or conductive objects to contact the battery terminals.

Do not use the battery if it is bulging, deformed or damaged.

To charge the mobile device battery, the battery and charger temperatures must be between +32°F and +104°F (0°C and +40°C).

Do not use batteries other than those provided by Unitech, otherwise we will not be responsible for the consequences.

Dispose of batteries according to instructions.


Please follow local regulations to promptly dispose of used rechargeable.

Do charge between 20% and 80% to protect your battery.

Avoid full discharges (<0%) or charging all the time (always 100%) to reduce stress on the battery.


Ring Scanner Side View

MS633

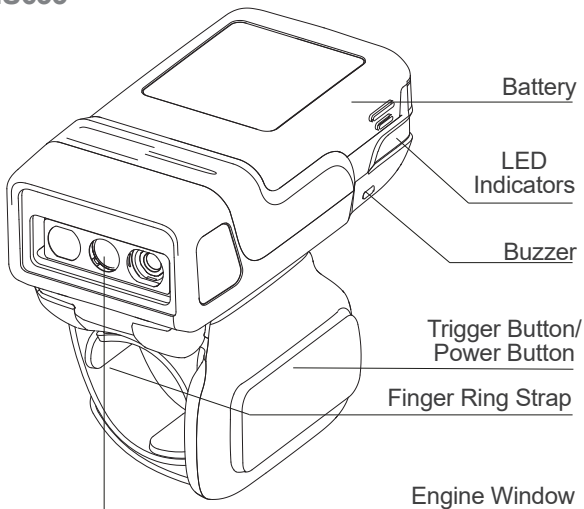

Ring Scanner Side View

MS633 LR

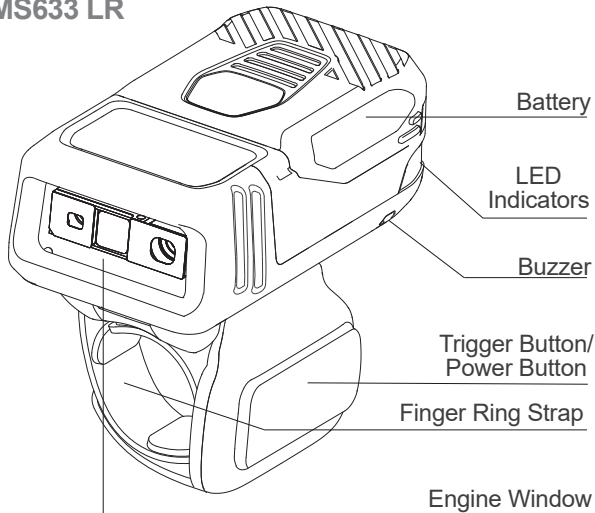


Ring Scanner Rear View

Turn ON/OFF

Turn ON the scanner after pressing and holding scanner's power/trigger button for 1.5 seconds.

Turn OFF the scanner after pressing and holding scanner's power/trigger button for 5 seconds.

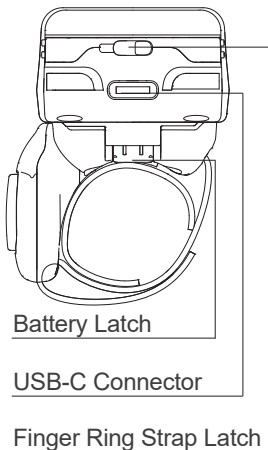


Optional Accessories


1




2



3



4

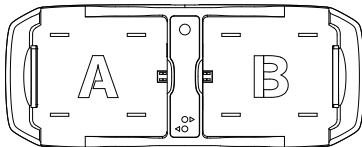

1. Battery

3. USB-C Cable

2. Finger Ring Strap

4. Battery Charger

Getting Started

Install the Finger Ring Strap

Determine whether the ring scanner is intended for use on the right or left hand, and rotate the trigger assembly accordingly. Position the trigger next to the thumb when the ring scanner is placed on the index finger.


Align and insert one end of the finger ring strap into the strap slot, then push the other end down until it snaps into place.

Please refer to the figures on the next page to follow the setup.

Removing the Finger Ring Strap


Press the finger ring strap latch inward and pull the entire strap outward to remove it.

Install the Finger Ring Strap

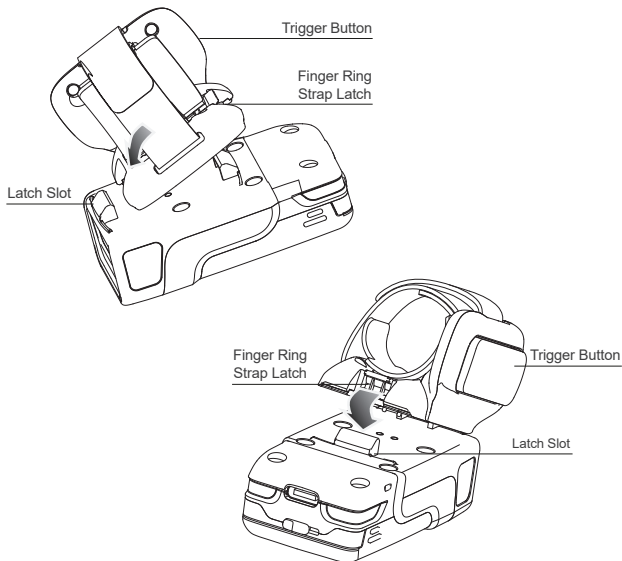


Install the Battery

1. Align and insert the battery with the slots of the MS633 / MS633 LR battery compartment.

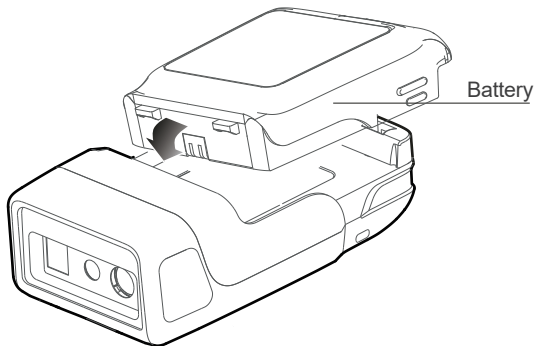

2. Press the battery into the battery compartment.

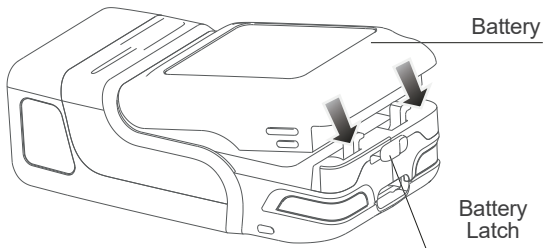

Remove the Battery


To remove the battery, slide the battery latch to the left, then grasp both sides of the battery and pull it upward to remove it.

Charging the Battery

Place the battery in the charger as follows:

- ① Align the end of the battery with the charger
- ② Pull out the retractor and
- ③ Press the other end into the compartment.

Note: Please pull out the retractors on either side of the charger before taking the battery out of the compartment.

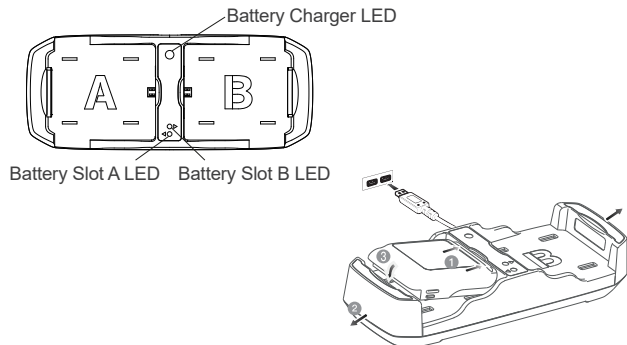

Battery Charger LED Status


Items	Description
Battery Charger LED	Red LED turns on: Battery Charger Power On
Battery SLOT A/B LED	Red LED turns on: Charging Green LED turns on: Fully Charged Light Off: No Battery Charging

MS633 / MS633 LR LED Status

Status	Description
Green LED blinks one time	Decode successfully
Green LED is blinking continuously	Low battery alarm
Red LED turns on	Charging
Red LED turns off	Fully Charged
Blue LED is blinking continuously	Start Bluetooth pairing
Blue LED turns off	Bluetooth pairing successfully

Scanning Techniques

Please aim the red light at the middle of the barcode when scanning the barcode. Please scan properly in accordance with the following diagram. Adjust the scanner's angle and distance slowly, while simultaneously pressing the trigger button to ensure that **the center red light covers both the left and right sides of the barcode**.

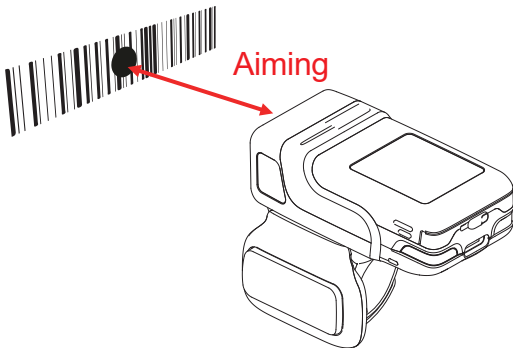

Service Information

If there is a question with the MS633 Series, please contact us via the link below:

<https://www.ute.com/en/contact>



<http://www.ute.com/>

EU Importer:

Unique Technology Europe B.V.

Kapitein Hatterasstraat 19, 5015 BB, Tilburg, the Netherlands

Quick Start Guide

Copyright Unitech Electronics Co., Ltd. All rights reserved.

Unitech is a registered trademark of Unitech Electronics Co., Ltd.

